


Search and Secure: Linac Downstream

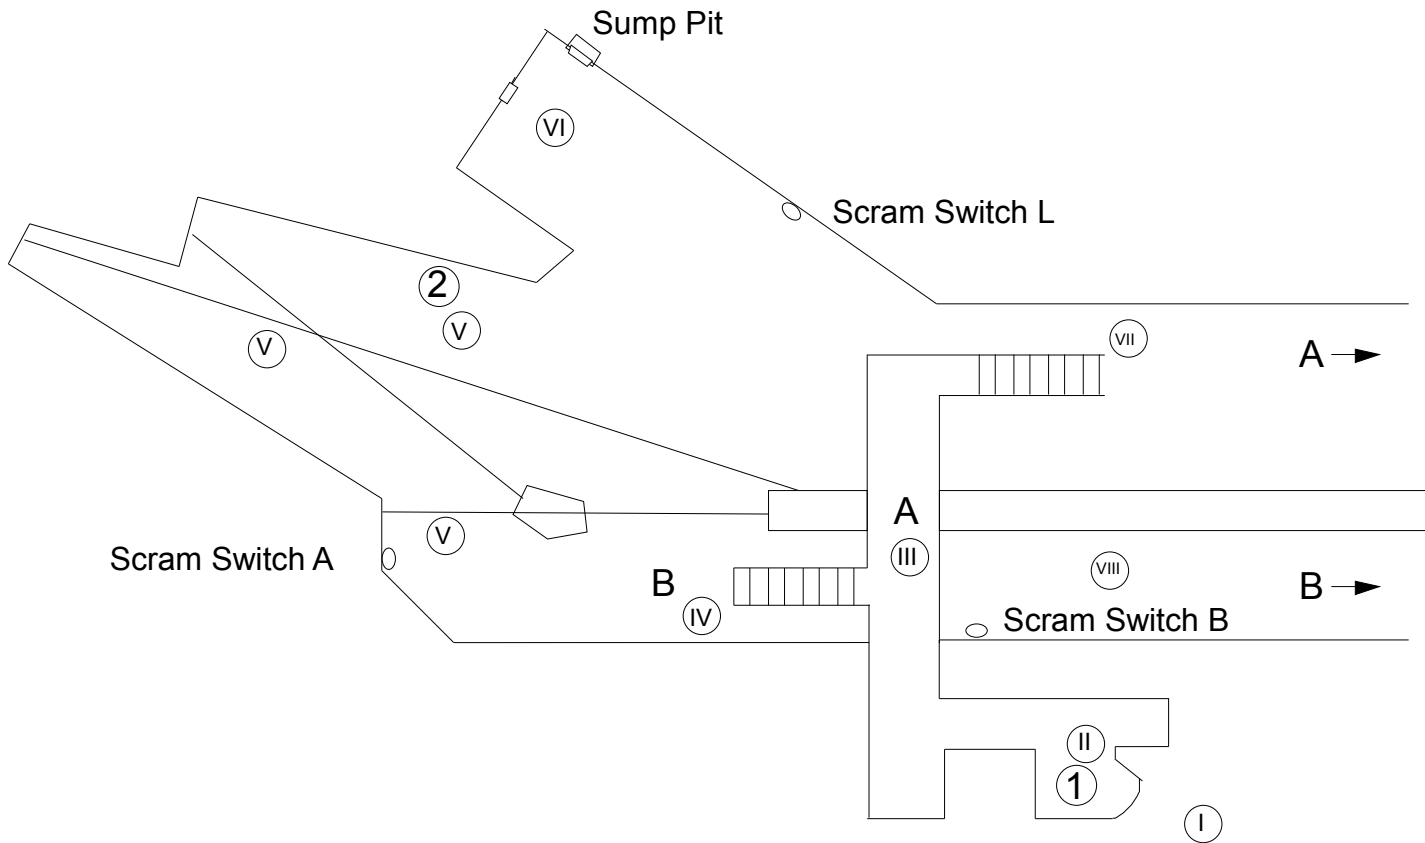

- I. "A" and "B" verifies the penetration key has not been removed. If it was, see procedure ***** for instructions to resecure the penetrations.
- II. "A" and "B" reset Interlock box #1, checks the hallway to the main enclosure.
- III. "A" waits on the bridge.
- IV. "B" walks down the stairs, checks the east side of the Spectrometer magnet.
- V. "B" passes under the beam pipes, checks the chute area, and resets Interlock box #2.
- VI. "B" checks the spur; looks through the window to verify the door is closed, and the sump pit.
- VII. "B" joins "A", "A" holds while "B" passes over to the east side of the Klystron tanks.