QG0370A

HAMAMATSU R5900-00-M64 PHOTOMULTIPLIER TUBE

Relative anode sensitivity changes as a function of operating time

[Conditions] Supply Voltage : 800 V
Initial Anode Current : 1 μA
Ambient Temperature : +25 °C
All Anode Connected

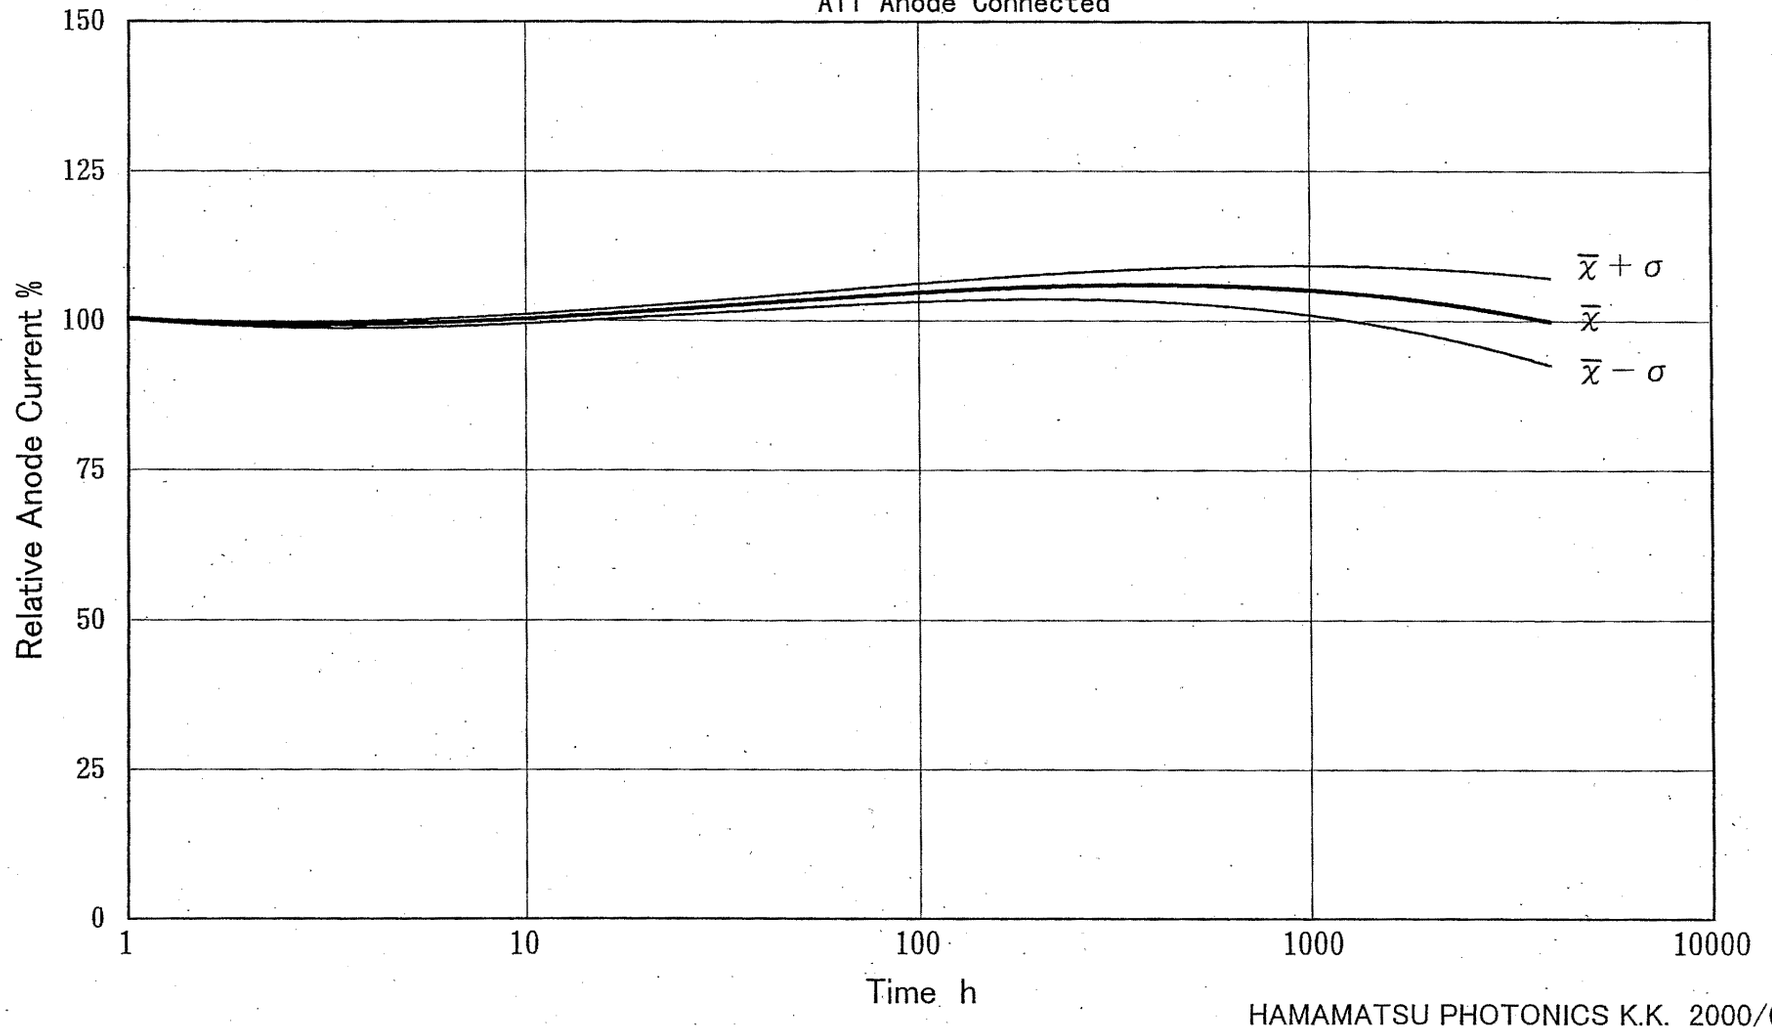

HAMAMATSU PHOTONICS K.K. 2000/05