










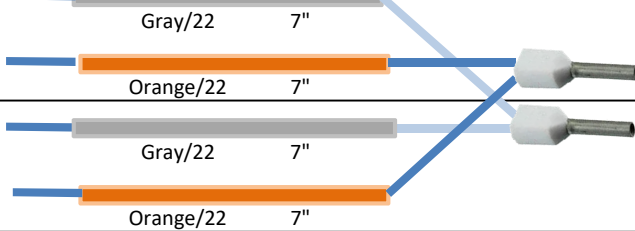



























Cable #	Description	Hardware	End 1	Color/Ga	Length	End 2	Hardware	Notes
RPS101	AC Input	0.183" x 30mil Quick Connect		White/22	4.5"		Molex 08-52-0072	Twist wires together
RPS102	AC Input	0.183" x 30mil Quick Connect		Black/22	4.5"		Molex 08-52-0072	
RPS103	AC Input	0.183" x 30mil Quick Connect		Green/22	6.5"		#4 Ring Terminal	
RPS104	DC Out	Molex 08-52-0072		Red/22	6.5"		Stripped 3/16"	Twist wires together
RPS105	DC Out	Molex 08-52-0072		Black/22	6.5"		Stripped 3/16"	
RPS106	Interlock	Stripped 3/16"/Solder		Gray/22	7"		Stripped 3/16"	Twist wires together
RPS107	Interlock +	Stripped 3/16"/Solder		Orange/22	7"		Stripped 3/16"	
RPS108	Interlock	Stripped 3/16"/Solder		Gray/22	7"		Stripped 3/16"	Twist wires together
RPS109	Interlock +	Stripped 3/16"/Solder		Orange/22	7"		Stripped 3/16"	
RPS110	UPS EPO C	Stripped 3/16"		White/22	6.5"		0.183" x 30mil Quick Connect	Braid wires together
RPS111	UPS EPO NC	Stripped 3/16"		Brown/22	6.5"		0.183" x 30mil Quick Connect	
RPS112	UPS EPO NO	Stripped 3/16"		Blue/22	6.5"		0.183" x 30mil Quick Connect	
RPS113	AUX 2 C	Stripped 3/16"		White/22	6.5"		0.183" x 30mil Quick Connect	Braid wires together
RPS114	AUX 2 NC	Stripped 3/16"		Yellow/22	6.5"		0.183" x 30mil Quick Connect	
RPS115	AUX 2 NO	Stripped 3/16"		Brown/22	6.5"		0.183" x 30mil Quick Connect	
RPS116	AUX 1 C	Stripped 3/16"		White/22	8"		0.183" x 30mil Quick Connect	Braid wires together
RPS117	AUX 1 NC	Stripped 3/16"		Red/22	8"		0.183" x 30mil Quick Connect	
RPS118	AUX 1 NO	Stripped 3/16"		Brown/22	8"		0.183" x 30mil Quick Connect	
RPS119	Smoke Detector -	Stripped 3/16"		Gray/22	10"		0.183" x 30mil Quick Connect	Twist wires together
RPS120	Smoke Detector +	Stripped 3/16"		Violet/22	10"		0.183" x 30mil Quick Connect	